

## DALI-LINK - System devices

## PS-DALI-LINK-DE



white , Art.-Nr.: 92846

## Product Information

Product may not be available in all countries

- DALI power supply for the B.E.G. DALI-LINK multi room solution for installation in suspended ceilings.
- Parameterisation of the DALI-LINK solution via Bluetooth with a smartphone and the B.E.G. DALI-LINK App.
- For example, 25 DALI luminaires and 6 DALI-LINK control devices (multi-sensors or push-button interfaces) can be connected to the power supply.
- It is possible to operate a maximum of one additional DALI-LINK power supply in parallel, doubling the number of DALI devices in the DALI-LINK system (50 DALI luminaires / 12 DALI-LINK control units).
- Integrated temperature monitoring and short-circuit detection
- Integrated LED for visualisation of operating information
- DALI-2 certified product

## Technical Data

|                                      |                           |
|--------------------------------------|---------------------------|
| <b>Voltage:</b>                      | 110 – 277 V AC 50 / 60 Hz |
| <b>Dimensions:</b>                   | 240 x 26 x 26 mm          |
| <b>Output voltage:</b>               | DALI – typical 16 V DC    |
| <b>Power consumption:</b>            | 3,3 W                     |
| <b>Degree / class of protection:</b> | IP20 / Class II           |
| <b>Ambient temperature:</b>          | -5 °C to +45 °C           |


**Housing:** Polycarbonate + ABS mixture  
**Connections and wires:** for solid conductors 0,25 – 2,5 mm<sup>2</sup>  
**Nominal current:** 100 mA  
**Nominal current (max.):** 120 mA

---

## Description

| Description     | Colour | Part number | EAN number    |
|-----------------|--------|-------------|---------------|
| PS-DALI-LINK-FC | white  | 92846       | 4007529928460 |

---

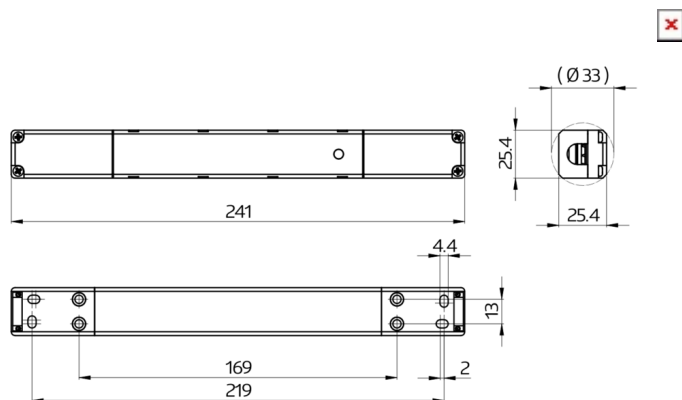

## Dimensions 92846



