


SKU	: 2.026C0B9300060R0000
Beam angle	: Zoom 15°-60°
Adjustability	: 355° rotational and 90° tiltable
CCT	: 3000K
CRI	: (RA) >90
Chromaticity tolerance	: 3
Luminous flux	: 1800Lm-2150Lm
Connected load	: 29W
System efficiency	: 74Lm/W
Lifetime/Failure rate	: >50000h/L70B30
Optic	: Zoom Lens
Color housing	: Black (RAL 9005)
Material	: Die Cast Aluminum
Mains voltage	: 220-240V / 50-60Hz
Max. ambient temperature	: 35°C
Ingress protection	: IP20
Energy rating (EEC)	: A+
Installation	: Track mounted
Net. weight	: 1.1Kg
Warranty	: 5 years

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K. Technical data can change without prior notice.

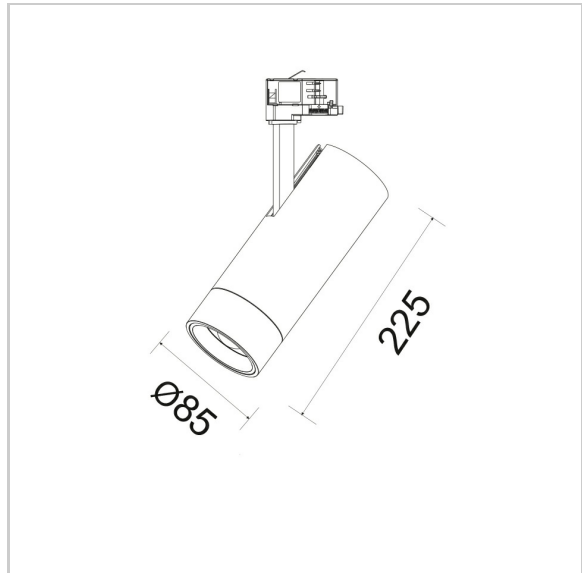

© 2019 Light4U BV. All rights reserved. Please visit light4u.io for more information.