

## POLARIS 100w, 150w, 200w

CODE: 4513, 4514, 4513, 4513, 4514, 4515, 4516, 4517, 4518, 4519, 4520, 521



## User Manual

### Important User Advice

This Product is Class I and must be Earthed.  
Always switch off mains supply before fitting.  
Replace any broken or damaged glass as soon as possible.  
Ensure all seals are intact and operational after fitting or maintenance.  
Do not touch the lamp in use or just after use as there is a risk of being burnt.  
Take off from flammable materials.  
Do not wash the lamp.  
Keeping your eyes with a security distance, the light could cause damage.

### Installation




Find a suitable location to install this product.  
Prepare the mains wiring.  
Use the mounting bracket to mark the hole centres for fixing.  
Drill holes suitable to accept wall plugs. Insert wall plugs.  
Ensure mounting bracket.  
Terminate wiring. Pay particular attention to any markings for  
Replace all covers.  
Fit the floodlight to the mounting bracket with the screws.  
Check seals, gaskets and cable gland operation before testing the luminaire.  
Turn on power supply and test luminaire.

### Maintenance


This product has no user serviceable parts.  
Clean with a damp cloth and dry with a lint-free cloth or kitchen towel.

### Important Information

It is recommended that luminaire installed and fitted by a qualified electrician ensuring the installation complies to the current building regulations.  
These products are designed for connection to a 220-240V supply.  
And broken or damaged parts should be replaced as soon as possible.  
LEL will not accept responsibility for any claims arising from a poor installation.

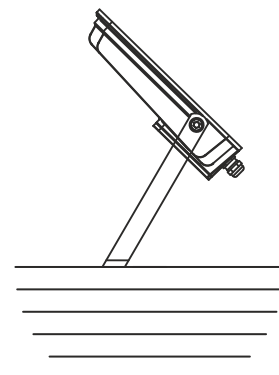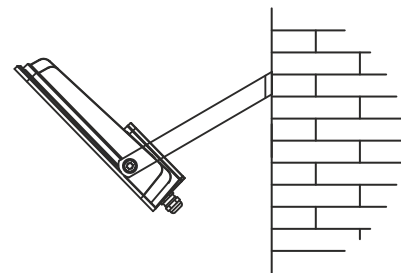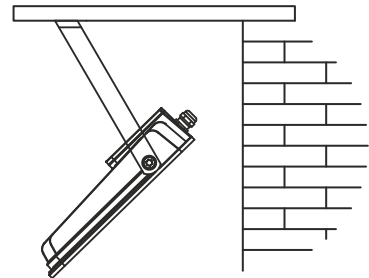


# Wire connection guide




## Step One

Use screw driver remove the back cover three screws.




## Step Two

Take off the back cover.




## Step Three

Take off the metal screw and rubber ring.




## Step Four

Put the cable into the metal screw, then put the cable into rubber ring. Connect the cable into the inside junction box.



## Step Five

Fix the metal screw on cable.




## Step Six

Fix the back cover screw.

1:screws. 2:the back cover. 3:the metal screw. 4:the rubber ring. 5:the inside junction box.

## Note:

The brown wire is connected with the L wire of city electricity  
 The blue one is connected with the N wire of city electricity.  
 The green/yellow one is connected with the earth wire.  
 Power Cord type: HO5RN-F 3 x 1.5mm<sup>2</sup>.

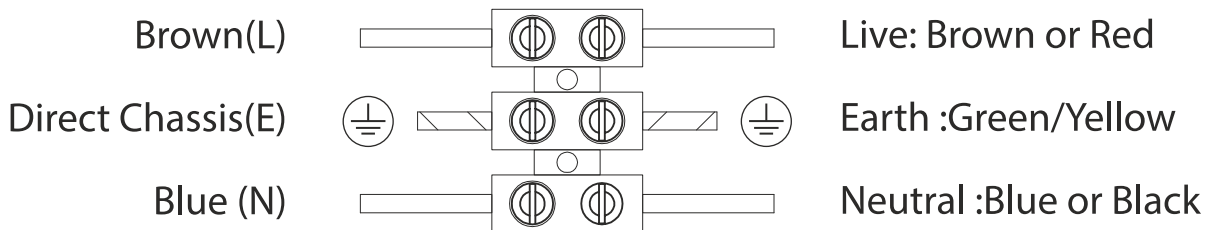

ALUMINIUM

IP65

CE



EMC



130lm/w



AKZO NOBEL  
ANTI CORROSIVE  
MARINE PAINT

RoHS

