




LED HT930 COB flex stripe for up to 100°C ambient temp., 24V DC, 14,4W, IP68, 3000K, 5m, 480 LED/m

Item number: 116132
EAN: 9009377155260

Product specification:

Dimmable: Y
Dimming type: PWM
Luminous flux: 1300 lm/m
Beam angle: 110°
Rated power: 14,4 W/m
Active power: 14,4 W/m
Rated voltage: 24 VDC
Colour temperature: 3000K
Color rendering index: 90 CRI ra (1-8)
Protection class: IP68
Ambient temperature: -20°C - 100°C
Housing color: black
Housing material: Silicone
Weight: 320,0 g
Length: 5000,0 mm
Width: 10,0 mm
Height: 6,0 mm
Useful lifespan L70 | B10: 38000 h
Useful lifespan L70 | B50: 57000 h
Useful lifespan L80 | B10: 37000 h
Useful lifespan L80 | B50: 50000 h
Useful lifespan L90 | B10: 33000 h
Useful lifespan L90 | B50: 44000 h
Warranty in years 3

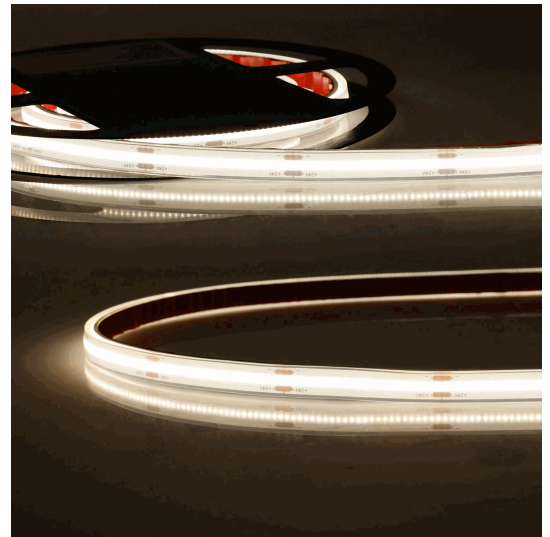

Dimming specification: Dimmable via PWM (pulse width modulated DC voltage supply) via upstream controller or dimmable transformer

features: Separation point: 50mm with 24 SMD each | Pitch (light point center-center): 2,08mm | 1 unit (roll) = 5m | max. flex stripe length per infeed: 5m | length tolerance + thermal expansion: 1% | no cooling profile required | incl. 3M VHB adhesive tape | clean and degrease substrate before sticking! Do not peel off again! | silicone encapsulation | SPECIAL FEATURE: connection cable on both sides | enclosed accessories: end caps, mounting bracket and sealant

For specific test reports, certifications of conformity and further product information feel free to contact our office.



ISOLED®

CUSTOMISED LIGHT SOLUTIONS

